


## SDM Dimmer Connection

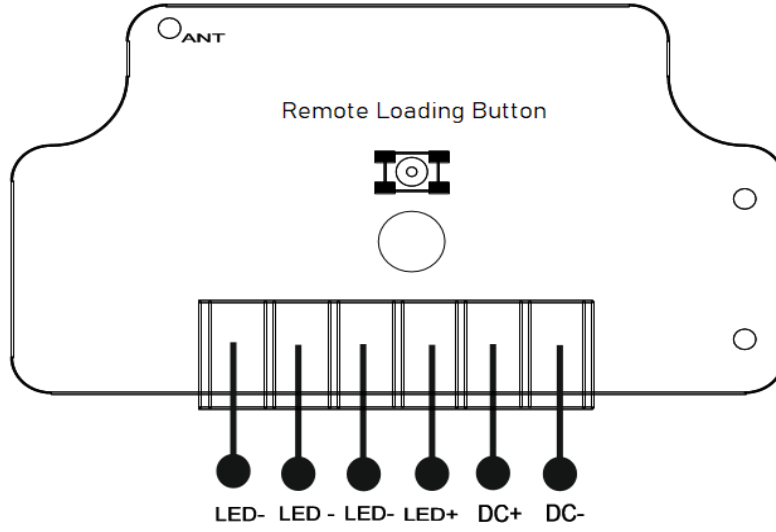

### Technical Specification

**Product Code:** SRGB

**Frequency:** 433,92 MHz

**Contact Output:** 12/24V DC

**Output Power:** 360 W

**Number of Color Dimmed:** 7 Colors

**Area of Usage:** Automation

**Remote Controller:** Compatible with SGK-6 Group Remote Controller

**Channel Numbers:** 3 Channels

**Operating Voltage:** 12/24V DC

**Code Type:** Fix Code

**External Appearance:** Polyester, grey color

**Dimensions:** 110 x 84 x 35 mm

### General information

Provide 12 / 24V DC energy to the power terminals of the dimmer card, pay attention to the plus and minus poles as shown in the diagram.

Led Dimmer Receiver has 3 channels. Each channel is 10 Amps maximum. A total load of 30 Amps can be connected to the Dimmer Receiver.

The positive (+) ends of the LEDs are common and the negative (-) ends can be connected via 3 different channels.

### Remote Control Introduction

Press the button of the remote you want to introduce and press the loading button on the dimer card. The LED light will flash during the installation.

When the installation is successful, the led light will turn off.

### Memory deletion

When the receiver is energized by holding down the download button, the stored passwords in your receiver's memory will be deleted.